

Surge protection for high-speed networks up to 10 GBit (Class EA/CAT6A)




Data cable protection device for high-speed networks

- High-quality RJ45 sockets
- Low protection level at high current load
- Earthing via hat rail or connection cable
- Support of Power over Ethernet + to 1 A
- Tested transmission quality in networks up to 10 GBit (Class EA) or CAT6A
- Rapid installation through plug-in version
- Incl. hat rail fastening set and earthing cable


Application example: 10 GBit Ethernet, 10/100 MBit Ethernet, PoE applications, IP camera systems, ISDN S0 interfaces

Type	Version	Connection system	Pack. pcs	Weight kg/100 pcs.	Item No.
ND-CAT6A/EA	Fine protection, 8 wires + shield	RJ45 8(8)	1	16,600	5081 80 0

Dimensions

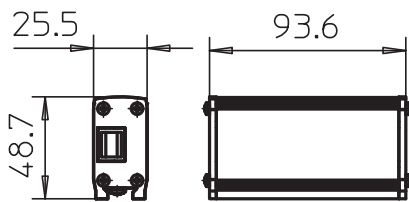

Connection options



ND-CAT6A/EA

Maximum continuous voltage AC V	U _c	41
Maximum continuous voltage DC V	U _c	58
Category		Type 2+3 / C2+C1
Lightning protection zone LPZ		1→3
Channel performance ISO/IEC		Class EA
Channel performance Ansi/EA		CAT 6A
Number of poles		8
Rated current A	I _n	1
Impulse durability wire-wire		C1: 0.3 kV / 0.15 kA (8/20 μs)
Impulse durability wire-earth		C2: 2 kV / 1 kA (8/20 μs)
Total discharge current (8/20) kA		7
Protection level wire-wire V		<120
Protection level wire-earth V		<700
Frequency range		>500 MHz
Temperature range °C	θ	-40-80
Installation type		Connector/cable adapter
Connection system		RJ45 8(8)
Protection rating		IP20
Shielding connection available		Yes
Shield connection		Direct
Earthing via:		Connection cable
Testing standard		IEC 61643-21