



Equipotential busbar BigBar for industrial application

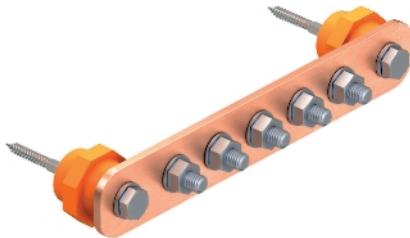

- Main potential equalisation to VDE 0100 Part 410 and Part 540, and also lightning protection potential equalisation to VDE 0185-305 (IEC 62305)
- Insulation feet
- Quick, simple assembly of connection conductors to the contact rail using lock bolts M10
- The high-grade stainless steel versions (V2A) are suitable for outdoor use
- Complete with anchors and bolts for wall mounting
- With lock washer (DIN 137) for bolt locking against loosening (e.g. required in industry and explosion-protected areas)

| Type | Number of connections | Width mm | Length mm | Height mm | Pack. pcs | Weight kg/100 pcs. | Item No. |
|------------|-----------------------|----------|-----------|-----------|-----------|--------------------|----------|
| 1802 5 CU | 5 | 40 | 246 | 5 | 1 | 80,000 | 5015830 |
| 1802 6 CU | 6 | 40 | 278,5 | 5 | 1 | 98,400 | 5015832 |
| 1802 8 CU | 8 | 40 | 343,5 | 5 | 1 | 116,550 | 5015836 |
| 1802 10 CU | 10 | 40 | 408,5 | 5 | 1 | 180,000 | 5015842 |
| 1802 12 CU | 12 | 40 | 473,5 | 5 | 1 | 152,850 | 5015844 |
| 1802 14 CU | 14 | 40 | 538,5 | 5 | 1 | 171,000 | 5015847 |
| 1802 20 CU | 20 | 40 | 733,5 | 5 | 1 | 225,450 | 5015849 |

Dimensions

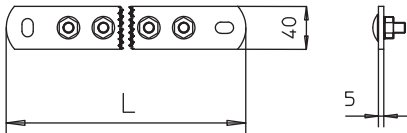

Cu Copper